

Catalogue

LED

LUXRAM

One & Only

The most innovative products for luxury projects and household decoration, the reflection of brilliant dream into reality, which enhance people' experience to unexpected sensation.

Pandora LED Candle



230V




E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7005000110011	3.5	White	280	0.40	100	27w	 30x87
7005000120011	3.5	Coolwhite	280	0.40	100	27w	
7005000130011	3.5	Warmwhite	280	0.40	100	27w	

Pandora LED Candle

*Symbolizes the creation in all its forms;
Captures the Luxram unique spirit of innovation...*



Pandora LED GU10



230V



GU10



25000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7006000110011	6	36°	White	500	400	0.50	100	50w	
7006000120011	6	36°	Coolwhite	500	400	0.50	100	50w	
7006000130011	6	36°	Warmwhite	500	400	0.50	100	50w	



Pandora LED GU10

*Symbolizes the creation in all its forms;
Captures the Luxram unique spirit of innovation...*

Kaleido LED Candle



230V




E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7003010210011	4	White	300	0.49	100	28w	 35×92
7003010220011	4	Coolwhite	300	0.49	100	28w	
7003010230011	4	Warmwhite	300	0.49	100	28w	

Kaleido LED Candle

*The reflection of brilliant dream into reality;
The integration of beauty and light...*



Kaleido LED Ball



230V




E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7004100110011	4	White	300	0.49	100	28w	 42×72
7004100120011	4	Coolwhite	300	0.49	100	28w	
7004100130011	4	Warmwhite	300	0.49	100	28w	

Kaleido LED Ball



230V




E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7004110110011	4	White	300	0.49	100	28w	 42×69
7004110120011	4	Coolwhite	300	0.49	100	28w	
7004110130011	4	Warmwhite	300	0.49	100	28w	

CrystaLED Candle



reddot design award
winner 2013



230V




E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7001001410011	3	White	300	0.52	100	28w	 31×80
7001001420011	3	Coolwhite	300	0.52	100	28w	
7001001430011	3	Warmwhite	300	0.52	100	28w	



One & Only

CrystaLED

CrystaLED Ball



230V




E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7002001410011	3	White	300	0.52	100	28w	 41×66
7002001420011	3	Coolwhite	300	0.52	100	28w	
7002001430011	3	Warmwhite	300	0.52	100	28w	

CrystaLED Ball



230V




E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7002012710011	3	White	300	0.52	100	28w	 41×66
7002012720011	3	Coolwhite	300	0.52	100	28w	
7002012730011	3	Warmwhite	300	0.52	100	28w	

2020

2020 breaks the traditional understanding of a bulb, Luxram brings the conceptual design into real life. It is an expression of freedom and a unique attitude to life. Graceful Shape in classical style.

2020 LED GU10



230V



GU10



25000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7203000310011	4	90°	White	180	300	0.92	100	30w	
7203000320011	4	90°	Coolwhite	180	300	0.92	100	30w	
7203000330011	4	90°	Warmwhite	180	300	0.92	100	30w	



2020 LED GU10

*From impossible to possible,
the cutting-edge design
implies limitless future...*



2020 LED MR16



12V



GU5.3




25000H



Ra ≥ 80


Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7205010310011	4	90°	White	180	300	0.76	100	30w	
7205010320011	4	90°	Coolwhite	180	300	0.76	100	30w	
7205010330011	4	90°	Warmwhite	180	300	0.76	100	30w	

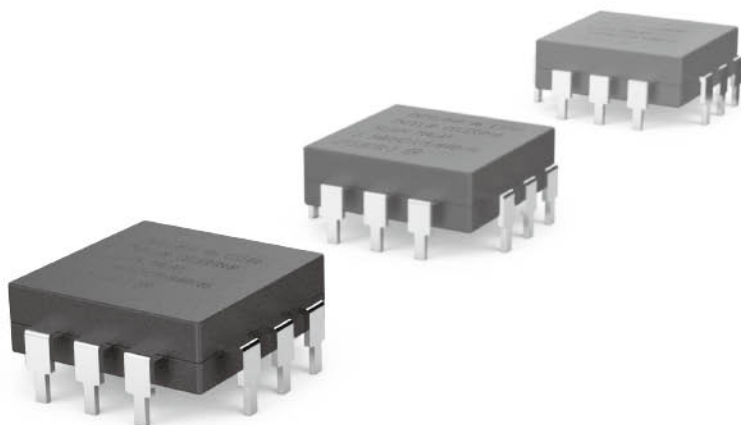


Coregium Technology

*The intelligent integrated
control gear solution*

Dimming Characteristics

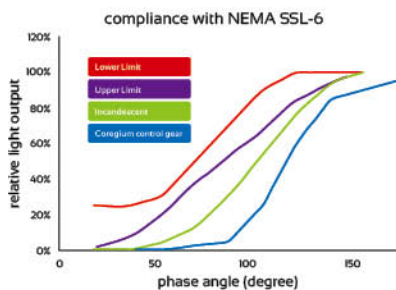

Highlight



2020 LED R7s Dimmable



reddot award 2014
honourable mention
lighting design



230V



R7s




25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7207010310011	10	White	806	0.98	100	60w	
7207010320011	10	Coolwhite	806	0.98	100	60w	
7207010330011	10	Warmwhite	806	0.98	100	60w	

51×23×118

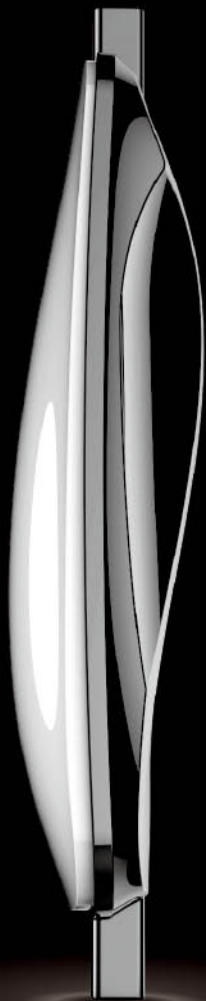

*Where your vision gets
started...*

*Where your heart gets
touched...*



2020 LED R7s

2020 LED R7s



230V



R7s



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7207000310011	10	White	806	0.98	100	60w	
7207000320011	10	Coolwhite	806	0.98	100	60w	
7207000330011	10	Warmwhite	806	0.98	100	60w	

51×23×118

Professional

Staying with its distinctive identity, it sets the true value by the combination of outstanding performance, reliable quality, innovative design and functionality.

Truevision LED GU10



Metallic grey



Dimmable



230V



GU10



45000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement WxH(mm)
7462031210010	5	30°	White	1300	400	0.50	100	50w	
7462031220010	5	30°	Coolwhite	1300	400	0.50	100	50w	
7462031230010	5	30°	Warmwhite	1300	400	0.50	100	50w	
7462011310010	5.5	30°	White	1300	400	0.58	100	50w	
7462011320010	5.5	30°	Coolwhite	1300	400	0.58	100	50w	
7462011330010	5.5	30°	Warmwhite	1300	400	0.58	100	50w	

Truevision LED MR16



Metallic grey



12V



GU5.3



45000H




Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7482011310010	6	36°	White	1300	450	0.78	100	40w	
7482011320010	6	36°	Coolwhite	1300	450	0.78	100	40w	
7482011330010	6	36°	Warmwhite	1300	450	0.78	100	40w	

Truevision LED AR111



Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7104011150010	11	36°	White	5530	810	0.7	50	60w	 111×62
7104011160010	11	36°	Coolwhite	5530	810	0.7	50	60w	
7104011170010	11	36°	Warmwhite	5530	810	0.7	50	60w	

Truevision LED GLS



230V



E27



15000H



Ra ≥ 95

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7071010710010	7	White	470	0.5	100	40w	 60×112
7071010720010	7	Coolwhite	470	0.5	100	40w	
7071010730010	7	Warmwhite	470	0.5	100	40w	
7071011110010	11	White	806	0.5	100	60w	 60×119
7071011120010	11	Coolwhite	806	0.5	100	60w	
7071011130010	11	Warmwhite	806	0.5	100	60w	
7071011510010	15	White	1055	0.5	100	75w	 60×119
7071011520010	15	Coolwhite	1055	0.5	100	75w	
7071011530010	15	Warmwhite	1055	0.5	100	75w	
7071011810010	18	White	1521	0.5	100	100w	 67×126
7071011820010	18	Coolwhite	1521	0.5	100	100w	
7071011830010	18	Warmwhite	1521	0.5	100	100w	

Truevision LED GLS Dimmable



230V



E27



15000H



Ra ≥ 95

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement WxH(mm)
7071000710010	7	White	470	0.95	100	40 _w	 60×112
7071000720010	7	Coolwhite	470	0.95	100	40 _w	
7071000730010	7	Warmwhite	470	0.95	100	40 _w	
7071001110010	11	White	806	0.95	100	60 _w	 60×119
7071001120010	11	Coolwhite	806	0.95	100	60 _w	
7071001130010	11	Warmwhite	806	0.95	100	60 _w	

Truevision LED Candle



230V



E14



15000H



Ra ≥ 95

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7071103510010	3.5	White	250	0.5	100	25 _w	 37×100
7071103520010	3.5	Coolwhite	250	0.5	100	25 _w	
7071103530010	3.5	Warmwhite	250	0.5	100	25 _w	
7071106510010	6.5	White	470	0.5	100	40 _w	
7071106520010	6.5	Coolwhite	470	0.5	100	40 _w	
7071106530010	6.5	Warmwhite	470	0.5	100	40 _w	

Truevision LED Candle Tip



230V



E14



15000H



Ra ≥ 95

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7071113510010	3.5	White	250	0.5	100	25 _w	 37×131
7071113520010	3.5	Coolwhite	250	0.5	100	25 _w	
7071113530010	3.5	Warmwhite	250	0.5	100	25 _w	
7071116510010	6.5	White	470	0.5	100	40 _w	
7071116520010	6.5	Coolwhite	470	0.5	100	40 _w	
7071116530010	6.5	Warmwhite	470	0.5	100	40 _w	

Truevision LED Ball



230V



E14



15000H



Ra ≥ 95

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7071203510010	3.5	White	250	0.5	100	25w	 45×76
7071203520010	3.5	Coolwhite	250	0.5	100	25w	
7071203530010	3.5	Warmwhite	250	0.5	100	25w	
7071206510010	6.5	White	470	0.5	100	40w	
7071206520010	6.5	Coolwhite	470	0.5	100	40w	
7071206530010	6.5	Warmwhite	470	0.5	100	40w	

Truevision LED **Ball**

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7071213510010	3.5	White	250	0.5	100	25w	 45×76
7071213520010	3.5	Coolwhite	250	0.5	100	25w	
7071213530010	3.5	Warmwhite	250	0.5	100	25w	
7071216510010	6.5	White	470	0.5	100	40w	
7071216520010	6.5	Coolwhite	470	0.5	100	40w	
7071216530010	6.5	Warmwhite	470	0.5	100	40w	

Truevision LED GU10 36°



230V



GU10



15000H



Ra ≥ 95

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7071320610010	6	36°	White	600	360	0.5	100	50w	
7071320620010	6	36°	Coolwhite	600	360	0.5	100	50w	
7071320630010	6	36°	Warmwhite	600	360	0.5	100	50w	

Truevision LED GU10 36° Dimmable



230V



GU10



15000H



Ra ≥ 95

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7071320610010	6	36°	White	600	360	0.9	100	50w	50x55
7071320620010	6	36°	Coolwhite	600	360	0.9	100	50w	
7071320630010	6	36°	Warmwhite	600	360	0.9	100	50w	

Truevision LED T8 $\Phi 26\text{mm}$ 

230V







G13



30000H



Ra ≥ 95

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Measurement W×H(mm)
7071541110010	11	White	900	0.5	25	 26×603
7071541120010	11	Coolwhite	900	0.5	25	
7071541130010	11	Warmwhite	900	0.5	25	
7071541610010	16	White	1400	0.5	25	 26×906
7071541620010	16	Coolwhite	1400	0.5	25	
7071541630010	16	Warmwhite	1400	0.5	25	
7071542010010	20	White	1800	0.5	25	 26×1212
7071542020010	20	Coolwhite	1800	0.5	25	
7071542030010	20	Warmwhite	1800	0.5	25	
7071542410010	24	White	2200	0.5	25	 26×1514
7071542420010	24	Coolwhite	2200	0.5	25	
7071542430010	24	Warmwhite	2200	0.5	25	

Truevision LED S14d



230V



S14d



25000H



Ra ≥ 95

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7091730530010	5	White	380	0.8	36	34 _w	30×300
7091730520010	5	Coolwhite	380	0.8	36	34 _w	
7091730510010	5	Warmwhite	380	0.8	36	34 _w	
7091730830010	8	White	600	0.8	36	48 _w	30×500
7091730820010	8	Coolwhite	600	0.8	36	48 _w	
7091730810010	8	Warmwhite	600	0.8	36	48 _w	

Truevision LED S14s



230V





S14s



25000H



Ra ≥ 95

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7091630530010	5	White	380	0.8	36	34 _w	 30×300
7091630520010	5	Coolwhite	380	0.8	36	34 _w	
7091630510010	5	Warmwhite	380	0.8	36	34 _w	
7091630830010	8	White	600	0.8	36	48 _w	 30×500
7091630820010	8	Coolwhite	600	0.8	36	48 _w	
7091630810010	8	Warmwhite	600	0.8	36	48 _w	

Hivision LED GLS



230V



E27



15000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7091012410010	24	White	2500	0.5	100	150w	 70×150
7091012420010	24	Coolwhite	2500	0.5	100	150w	
7091012430010	24	Warmwhite	2500	0.5	100	150w	

Hivision LED Candle



230V



E14



15000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7091106510010	6.5	White	600	0.5	100	48 _w	37×100
7091106520010	6.5	Coolwhite	600	0.5	100	48 _w	
7091106530010	6.5	Warmwhite	600	0.5	100	48 _w	
7091100810010	8	White	806	0.5	100	60 _w	
7091100820010	8	Coolwhite	806	0.5	100	60 _w	
7091100830010	8	Warmwhite	806	0.5	100	60 _w	

Hivision LED GU10 36°



230V



GU10



15000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7091326510010	6.5	36°	White	1100	600	0.5	100	80w	50x55
7091326520010	6.5	36°	Coolwhite	1100	600	0.5	100	80w	
7091326530010	6.5	36°	Warmwhite	1100	600	0.5	100	80w	

Hivision LED GU10 100°



230V



GU10



15000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7091316510010	6.5	100°	White	290	600	0.5	100	70w	50x55
7091316520010	6.5	100°	Coolwhite	290	600	0.5	100	70w	
7091316530010	6.5	100°	Warmwhite	290	600	0.5	100	70w	

Hivision LED T8 $\Phi 26$ mm

230V



G13



30000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Measurement W×H(mm)
7091541110010	11	White	1400	0.5	25	 26×603
7091541120010	11	Coolwhite	1400	0.5	25	
7091541130010	11	Warmwhite	1400	0.5	25	
7091541610010	16	White	2200	0.5	25	 26×906
7091541620010	16	Coolwhite	2200	0.5	25	
7091541630010	16	Warmwhite	2200	0.5	25	
7091542010010	20	White	2800	0.5	25	 26×1212
7091542020010	20	Coolwhite	2800	0.5	25	
7091542030010	20	Warmwhite	2800	0.5	25	
7091542410010	24	White	3600	0.5	25	 26×1514
7091542420010	24	Coolwhite	3600	0.5	25	
7091542430010	24	Warmwhite	3600	0.5	25	

Special

The combination of special products' outstanding performance and reliable quality deliver the true value to end users.

Lineax LED S14s



230V






S14s



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (standard)	Measurement W×H(mm)
7261400210010	4	White	380	0.8	36	34 _w	 30×300
7261400220010	4	Coolwhite	380	0.8	36	34 _w	
7261400230010	4	Warmwhite	380	0.8	36	34 _w	
7261400410010	8	White	700	0.8	36	54 _w	 30×500
7261400420010	8	Coolwhite	700	0.8	36	54 _w	
7261400430010	8	Warmwhite	700	0.8	36	54 _w	
7261400610010	16	White	1280	0.8	36	87 _w	 30×1000
7261400620010	16	Coolwhite	1280	0.8	36	87 _w	
7261400630010	16	Warmwhite	1280	0.8	36	87 _w	

Lineax LED S14d



230V



S14d



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (standard)	Measurement W×H(mm)
7261410210010	4	White	380	0.8	36	34 _w	30×300
7261410220010	4	Coolwhite	380	0.8	36	34 _w	
7261410230010	4	Warmwhite	380	0.8	36	34 _w	
7261410410010	8	White	700	0.8	36	54 _w	30×500
7261410420010	8	Coolwhite	700	0.8	36	54 _w	
7261410430010	8	Warmwhite	700	0.8	36	54 _w	
7261410610010	16	White	1280	0.8	36	87 _w	30×1000
7261410620010	16	Coolwhite	1280	0.8	36	87 _w	
7261410630010	16	Warmwhite	1280	0.8	36	87 _w	

Lineax LED S19



230V



S19



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7043300510010	5	White	470	0.5	36	40w	
7043300520010	5	Coolwhite	470	0.5	36	40w	
7043300530010	5	Warmwhite	470	0.5	36	40w	

CapsuLED G4



12V




G4



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7505501210010	1.2	White	100	0.75	200	10w	 12×38
7505501220010	1.2	Coolwhite	100	0.75	200	10w	
7505501230010	1.2	Warmwhite	100	0.75	200	10w	

CapsuLED G9



Dimmable



230V



G9



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion	Measurement
7503100110010	2	White	150	0.92	200	16w	
7503100120010	2	Coolwhite	150	0.92	200	16w	
7503100130010	2	Warmwhite	150	0.92	200	16w	
7503110110010	2	White	200	0.41	200	21w	
7503110120010	2	Coolwhite	200	0.41	200	21w	
7503110130010	2	Warmwhite	200	0.41	200	21w	
7503123510010	3.5	White	360	0.55	200	33w	
7503123520010	3.5	Coolwhite	360	0.55	200	33w	
7503123530010	3.5	Warmwhite	360	0.55	200	33w	


Pixy LED G4



Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7501100210010	2	White	165	0.65	200	18w	
7501100220010	2	Coolwhite	165	0.65	200	18w	
7501100230010	2	Warmwhite	165	0.65	200	18w	
7501100310010	2.5	White	250	0.74	200	25w	
7501100320010	2.5	Coolwhite	250	0.74	200	25w	
7501100330010	2.5	Warmwhite	250	0.74	200	25w	

Pixy LED G9





Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7503000110010	2.5	White	210	0.55	200	22w	 16×50
7503000120010	2.5	Coolwhite	210	0.55	200	22w	
7503000130010	2.5	Warmwhite	210	0.55	200	22w	
7503000310010	3	White	260	0.45	200	26w	 16×49
7503000320010	3	Coolwhite	260	0.45	200	26w	
7503000330010	3	Warmwhite	260	0.45	200	26w	

Pixy LED R7s




230V | R7s | 25000H | Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement WxH(mm)
7504000110010	5	White	490	0.55	100	41w	 25x78
7504000120010	5	Coolwhite	490	0.55	100	41w	
7504000130010	5	Warmwhite	490	0.55	100	41w	
7504000210010	8	White	850	0.55	100	63w	 25x118
7504000220010	8	Coolwhite	850	0.55	100	63w	
7504000230010	8	Warmwhite	850	0.55	100	63w	

Pixy LED ST22




230V E14 25000H Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7053100110010	1	White	65	0.35	200	10w	 22×50
7053100120010	1	Coolwhite	65	0.35	200	10w	
7053100130010	1	Warmwhite	65	0.35	200	10w	
7053100410010	2	White	138	0.35	200	15w	
7053100420010	2	Coolwhite	138	0.35	200	15w	
7053100430010	2	Warmwhite	138	0.35	200	15w	

Pixy LED ST26



230V E14 25000H Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7053000210010	1	White	65	0.35	200	10w	 26×60
7053000220010	1	Coolwhite	65	0.35	200	10w	
7053000230010	1	Warmwhite	65	0.35	200	10w	
7053000410010	2	White	138	0.35	200	15w	
7053000420010	2	Coolwhite	138	0.35	200	15w	
7053000430010	2	Warmwhite	138	0.35	200	15w	

General

*The best balance of functionality and design,
providing replacement for all general lighting
applications.*

Duramax LED GLS



230V



E27



25000H






Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7512750410010	6	White	470	0.55	100	40 _w	 60×111
7512750420010	6	Coolwhite	470	0.55	100	40 _w	
7512750430010	6	Warmwhite	470	0.55	100	40 _w	
7512750610010	7	White	630	0.52	100	50 _w	
7512750620010	7	Coolwhite	630	0.52	100	50 _w	
7512750630010	7	Warmwhite	630	0.52	100	50 _w	
7512750810010	8.5	White	806	0.55	100	60 _w	 60×112
7512750820010	8.5	Coolwhite	806	0.55	100	60 _w	
7512750830010	8.5	Warmwhite	806	0.55	100	60 _w	
7512750910010	11	White	1055	0.55	100	75 _w	 65×124
7512750920010	11	Coolwhite	1055	0.55	100	75 _w	
7512750930010	11	Warmwhite	1055	0.55	100	75 _w	
7512751010010	16	White	1521	0.52	100	100 _w	 65×124
7512751020010	16	Coolwhite	1521	0.52	100	100 _w	
7512751030010	16	Warmwhite	1521	0.52	100	100 _w	

Duramax LED GLS Dimmable



230V E27 25000H Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7512760410010	6	White	470	0.95	100	40w	 60×111
7512760420010	6	Coolwhite	470	0.95	100	40w	
7512760430010	6	Warmwhite	470	0.95	100	40w	
7512760710010	8.5	White	806	0.95	100	60w	
7512760720010	8.5	Coolwhite	806	0.95	100	60w	
7512760730010	8.5	Warmwhite	806	0.95	100	60w	 60×112
7512761110010	11	White	1055	0.95	100	75w	
7512761120010	11	Coolwhite	1055	0.95	100	75w	
7512761130010	11	Warmwhite	1055	0.95	100	75w	 65×124
7512761610010	16	White	1521	0.95	100	100w	
7512761620010	16	Coolwhite	1521	0.95	100	100w	
7512761630010	16	Warmwhite	1521	0.95	100	100w	

Duramax LED Candle



230V



E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7621111110010	3	White	250	0.42	100	25w	 37×100
7621111120010	3	Coolwhite	250	0.42	100	25w	
7621111130010	3	Warmwhite	250	0.42	100	25w	
7621111210010	4	White	350	0.42	100	32w	
7621111220010	4	Coolwhite	350	0.42	100	32w	
7621111230010	4	Warmwhite	350	0.42	100	32w	
7621111310010	5	White	470	0.51	100	40w	
7621111320010	5	Coolwhite	470	0.51	100	40w	
7621111330010	5	Warmwhite	470	0.51	100	40w	

Duramax LED Candle Tip



230V




E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7622111110010	3	White	250	0.42	100	25w	 37×131
7622111120010	3	Coolwhite	250	0.42	100	25w	
7622111130010	3	Warmwhite	250	0.42	100	25w	
7622111210010	4	White	350	0.42	100	32w	
7622111220010	4	Coolwhite	350	0.42	100	32w	
7622111230010	4	Warmwhite	350	0.42	100	32w	
7622111310010	5	White	470	0.51	100	40w	
7622111320010	5	Coolwhite	470	0.51	100	40w	
7622111330010	5	Warmwhite	470	0.51	100	40w	

Duramax LED Ball



230V




E14



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7623111110010	3	White	250	0.42	100	25w	 45×79
7623111120010	3	Coolwhite	250	0.42	100	25w	
7623111130010	3	Warmwhite	250	0.42	100	25w	
7623111210010	4	White	350	0.42	100	32w	
7623111220010	4	Coolwhite	350	0.42	100	32w	
7623111230010	4	Warmwhite	350	0.42	100	32w	
7623111310010	5	White	470	0.51	100	40w	
7623111320010	5	Coolwhite	470	0.51	100	40w	
7623111330010	5	Warmwhite	470	0.51	100	40w	

Duramax LED Ball



230V




E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7624111110010	3	White	250	0.42	100	25w	 45x74
7624111120010	3	Coolwhite	250	0.42	100	25w	
7624111130010	3	Warmwhite	250	0.42	100	25w	
7624111210010	4	White	350	0.42	100	32w	
7624111220010	4	Coolwhite	350	0.42	100	32w	
7624111230010	4	Warmwhite	350	0.42	100	32w	
7624111310010	5	White	470	0.51	100	40w	
7624111320010	5	Coolwhite	470	0.51	100	40w	
7624111330010	5	Warmwhite	470	0.51	100	40w	

Duramax LED Globe 95mm



230V

E27

25000H

Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7638181710010	10	White	1055	0.55	50	75w	 95×136
7638181720010	10	Coolwhite	1055	0.55	50	75w	
7638181730010	10	Warmwhite	1055	0.55	50	75w	
7638181310010	13	White	1200	0.55	50	83w	
7638181320010	13	Coolwhite	1200	0.55	50	83w	
7638181330010	13	Warmwhite	1200	0.55	50	83w	

Duramax LED Globe 120mm



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7638181810010	16	White	1521	0.52	20	100w	
7638181820010	16	Coolwhite	1521	0.52	20	100w	
7638181830010	16	Warmwhite	1521	0.52	20	100w	

Focus LED GU10 36°



Dimmable



230V



GU10



25000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement WxH(mm)
7604020210010	2.5	36°	White	300	180	0.42	100	25w	
7604020220010	2.5	36°	Coolwhite	300	180	0.42	100	25w	
7604020230010	2.5	36°	Warmwhite	300	180	0.42	100	25w	
7604020410010	4	36°	White	450	250	0.42	100	35w	
7604020420010	4	36°	Coolwhite	450	250	0.42	100	35w	
7604020430010	4	36°	Warmwhite	450	250	0.42	100	35w	
7604020610010	5.5	36°	White	600	360	0.55	100	50w	
7604020620010	5.5	36°	Coolwhite	600	360	0.55	100	50w	
7604020630010	5.5	36°	Warmwhite	600	360	0.55	100	50w	
7604420610010	5.5	36°	White	600	360	0.93	100	50w	
7604420620010	5.5	36°	Coolwhite	600	360	0.93	100	50w	
7604420630010	5.5	36°	Warmwhite	600	360	0.93	100	50w	

Focus LED GU10 36°



Dimmable



230V



GU10



25000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7604120210010	2.5	36°	White	300	180	0.42	100	25w	 50x59
7604120220010	2.5	36°	Coolwhite	300	180	0.42	100	25w	
7604120230010	2.5	36°	Warmwhite	300	180	0.42	100	25w	
7604120410010	4	36°	White	450	250	0.42	100	35w	
7604120420010	4	36°	Coolwhite	450	250	0.42	100	35w	
7604120430010	4	36°	Warmwhite	450	250	0.42	100	35w	
7604120610010	5.5	36°	White	600	360	0.55	100	50w	 50x59 Dimmable
7604120620010	5.5	36°	Coolwhite	600	360	0.55	100	50w	
7604120630010	5.5	36°	Warmwhite	600	360	0.55	100	50w	
7604520610010	5.5	36°	White	600	360	0.93	100	50w	
7604520620010	5.5	36°	Coolwhite	600	360	0.93	100	50w	
7604520630010	5.5	36°	Warmwhite	600	360	0.93	100	50w	

Focus LED GU10 100°



Dimmable



230V



GU10



25000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7604040210010	4	100°	White	120	250	0.45	100	25w	 50×59
7604040220010	4	100°	Coolwhite	120	250	0.45	100	25w	
7604040230010	4	100°	Warmwhite	120	250	0.45	100	25w	
7604040410010	5	100°	White	160	350	0.55	100	35w	
7604040420010	5	100°	Coolwhite	160	350	0.55	100	35w	
7604040430010	5	100°	Warmwhite	160	350	0.55	100	35w	
7604040610010	6	100°	White	220	450	0.55	100	50w	 50×59 Dimmable
7604040620010	6	100°	Coolwhite	220	450	0.55	100	50w	
7604040630010	6	100°	Warmwhite	220	450	0.55	100	50w	
7604440410010	5.5	100°	White	160	350	0.93	100	35w	
7604440420010	5.5	100°	Coolwhite	160	350	0.93	100	35w	
7604440430010	5.5	100°	Warmwhite	160	350	0.93	100	35w	

Focus LED GU10 100°



Dimmable



230V





GU10



25000H



Ra ≥ 80

Art . No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7604140210010	4	100°	White	120	250	0.45	100	25w	 50×59
7604140220010	4	100°	Coolwhite	120	250	0.45	100	25w	
7604140230010	4	100°	Warmwhite	120	250	0.45	100	25w	
7604140410010	5	100°	White	160	350	0.55	100	35w	
7604140420010	5	100°	Coolwhite	160	350	0.55	100	35w	
7604140430010	5	100°	Warmwhite	160	350	0.55	100	35w	
7604140610010	6	100°	White	220	450	0.55	100	50w	 50×59 Dimmable
7604140620010	6	100°	Coolwhite	220	450	0.55	100	50w	
7604140630010	6	100°	Warmwhite	220	450	0.55	100	50w	
7604540410010	5.5	100°	White	160	350	0.93	100	35w	
7604540420010	5.5	100°	Coolwhite	160	350	0.93	100	35w	
7604540430010	5.5	100°	Warmwhite	160	350	0.93	100	35w	

Focus LED MR16 36°



12V





GU5.3



25000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7664020210010	4	36°	White	430	250	0.75	100	20w	 50×50 White Finish
7664020220010	4	36°	Coolwhite	430	250	0.75	100	20w	
7664020230010	4	36°	Warmwhite	430	250	0.75	100	20w	
7664020410010	5	36°	White	530	360	0.75	100	35w	
7664020420010	5	36°	Coolwhite	530	360	0.75	100	35w	 50×50 Silver Finish
7664020430010	5	36°	Warmwhite	530	360	0.75	100	35w	
7664120210010	4	36°	White	430	250	0.75	100	20w	
7664120220010	4	36°	Coolwhite	430	250	0.75	100	20w	
7664120230010	4	36°	Warmwhite	430	250	0.75	100	20w	
7664120410010	5	36°	White	530	360	0.75	100	35w	
7664120420010	5	36°	Coolwhite	530	360	0.75	100	35w	
7664120430010	5	36°	Warmwhite	530	360	0.75	100	35w	

Focus LED MR16 100°



Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7664040210010	5	100°	White	160	350	0.75	100	20w	 50x50 White Finish
7664040220010	5	100°	Coolwhite	160	350	0.75	100	20w	
7664040230010	5	100°	Warmwhite	160	350	0.75	100	20w	
7664040410010	6.5	100°	White	250	550	0.75	100	35w	
7664040420010	6.5	100°	Coolwhite	250	550	0.75	100	35w	 50x50 Silver Finish
7664040430010	6.5	100°	Warmwhite	250	550	0.75	100	35w	
7664140210010	5	100°	White	160	350	0.75	100	20w	
7664140220010	5	100°	Coolwhite	160	350	0.75	100	20w	
7664140230010	5	100°	Warmwhite	160	350	0.75	100	20w	 50x50 Silver Finish
7664140410010	6.5	100°	White	250	550	0.75	100	35w	
7664140420010	6.5	100°	Coolwhite	250	550	0.75	100	35w	
7664140430010	6.5	100°	Warmwhite	250	550	0.75	100	35w	

Duramax LED R50



230V




E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7586040010010	6	White	470	0.54	100	40w	 50×89
7586040020010	6	Coolwhite	470	0.54	100	40w	
7586040030010	6	Warmwhite	470	0.54	100	40w	

Duramax LED R63



230V




E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7597340110010	9	White	806	0.5	100	60w	 63×102
7597340120010	9	Coolwhite	806	0.5	100	60w	
7597340130010	9	Warmwhite	806	0.5	100	60w	

Duramax LED R80



230V




E27



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7597340510010	13	White	1055	0.5	50	75w	 80×113
7597340520010	13	Coolwhite	1055	0.5	50	75w	
7597340530010	13	Warmwhite	1055	0.5	50	75w	

Duramax LED PAR20



230V




E27



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7080002010010	6	White	500	0.5	100	60w	 62×90
7080002020010	6	Coolwhite	500	0.5	100	60w	
7080002030010	6	Warmwhite	500	0.5	100	60w	

Duramax LED PAR30



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7080003010010	9	White	820	0.53	50	100w	
7080003020010	9	Coolwhite	820	0.53	50	100w	
7080003030010	9	Warmwhite	820	0.53	50	100w	

Duramax LED PAR38



230V




E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7080003810010	14	White	1300	0.55	20	150w	
7080003820010	14	Coolwhite	1300	0.55	20	150w	
7080003830010	14	Warmwhite	1300	0.55	20	150w	

Value

Low cost without sacrificing product reliability, it means the general illumination requirement of household.

Value LED GLS



230V



E27



15000H







Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7021010510010	6	White	470	0.5	100	40w	 60×112
7021010520010	6	Coolwhite	470	0.5	100	40w	
7021010530010	6	Warmwhite	470	0.5	100	40w	
7021010810010	8.5	White	806	0.5	100	60w	 60×119
7021010820010	8.5	Coolwhite	806	0.5	100	60w	
7021010830010	8.5	Warmwhite	806	0.5	100	60w	
7021011010010	10	White	1055	0.5	100	75w	 60×119
7021011020010	10	Coolwhite	1055	0.5	100	75w	
7021011030010	10	Warmwhite	1055	0.5	100	75w	
7021011510010	15	White	1521	0.5	100	100w	 67×126
7021011520010	15	Coolwhite	1521	0.5	100	100w	
7021011530010	15	Warmwhite	1521	0.5	100	100w	

Value LED GLS Dimmable



 230V |
  E27 |
  15000H |
  Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7021013610010	6	White	470	0.95	100	40w	 60×112
7021013620010	6	Coolwhite	470	0.95	100	40w	
7021013630010	6	Warmwhite	470	0.95	100	40w	
7021013810010	8	White	806	0.95	100	60w	 60×119
7021013820010	8	Coolwhite	806	0.95	100	60w	
7021013830010	8	Warmwhite	806	0.95	100	60w	
7021013110010	11	White	1055	0.95	100	75w	 60×119
7021013120010	11	Coolwhite	1055	0.95	100	75w	
7021013130010	11	Warmwhite	1055	0.95	100	75w	
7021013710010	16	White	1521	0.95	100	100w	 67×126
7021013720010	16	Coolwhite	1521	0.95	100	100w	
7021013730010	16	Warmwhite	1521	0.95	100	100w	

Value LED Candle



230V



E14



15000H





Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7021100310010	3	White	250	0.4	100	25w	 37×100
7021100320010	3	Coolwhite	250	0.4	100	25w	
7021100330010	3	Warmwhite	250	0.4	100	25w	
7021100410010	4	White	350	0.45	100	32w	
7021100420010	4	Coolwhite	350	0.45	100	32w	
7021100430010	4	Warmwhite	350	0.45	100	32w	
7021100510010	5	White	470	0.55	100	40w	
7021100520010	5	Coolwhite	470	0.55	100	40w	
7021100530010	5	Warmwhite	470	0.55	100	40w	

Value LED **Ball**

 230V
  E14
  15000H
  Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7021200310010	3	White	250	0.4	100	25w	 45×76
7021200320010	3	Coolwhite	250	0.4	100	25w	
7021200330010	3	Warmwhite	250	0.4	100	25w	
7021200410010	4	White	350	0.45	100	32w	
7021200420010	4	Coolwhite	350	0.45	100	32w	
7021200430010	4	Warmwhite	350	0.45	100	32w	 45×82
7021200510010	5	White	470	0.55	100	40w	
7021200520010	5	Coolwhite	470	0.55	100	40w	
7021200530010	5	Warmwhite	470	0.55	100	40w	

Value LED Ball





230V

E27

15000H

Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7021210310010	3	White	250	0.4	100	25w	 45×76
7021210320010	3	Coolwhite	250	0.4	100	25w	
7021210330010	3	Warmwhite	250	0.4	100	25w	
7021210410010	4	White	350	0.45	100	32w	
7021210420010	4	Coolwhite	350	0.45	100	32w	 45×82
7021210430010	4	Warmwhite	350	0.45	100	32w	
7021210510010	5	White	470	0.55	100	40w	
7021210520010	5	Coolwhite	470	0.55	100	40w	
7021210530010	5	Warmwhite	470	0.55	100	40w	

Value LED GU10 36°



230V

GU10

15000H

Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement WxH(mm)
7021300310010	3	36°	White	550	250	0.4	100	35w	
7021300320010	3	36°	Coolwhite	550	250	0.4	100	35w	
7021300330010	3	36°	Warmwhite	550	250	0.4	100	35w	
7021300410010	4	36°	White	600	360	0.45	100	50w	
7021300420010	4	36°	Coolwhite	600	360	0.45	100	50w	
7021300430010	4	36°	Warmwhite	600	360	0.45	100	50w	

Value LED GU10 100°



230V



GU10



15000H



Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement WxH(mm)
7021320310010	3	100°	White	100	250	0.4	100	25w	
7021320320010	3	100°	Coolwhite	100	250	0.4	100	25w	
7021320330010	3	100°	Warmwhite	100	250	0.4	100	25w	
7021320410010	4	100°	White	140	350	0.55	100	35w	
7021320420010	4	100°	Coolwhite	140	350	0.55	100	35w	
7021320430010	4	100°	Warmwhite	140	350	0.55	100	35w	

HaloLED GU10 36°



230V

GU10

15000h

Ra ≥ 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7605020410010	4	36°	White	550	250	0.42	100	35w	
7605020420010	4	36°	Coolwhite	550	250	0.42	100	35w	
7605020430010	4	36°	Warmwhite	550	250	0.42	100	35w	
7605020610010	4.5	36°	White	600	360	0.55	100	50w	
7605020620010	4.5	36°	Coolwhite	600	360	0.55	100	50w	
7605020630010	4.5	36°	Warmwhite	600	360	0.55	100	50w	

HaloLED GU10 100°



230V



GU10



15000H



Ra > 80

Art. No	Watt (W)	Beam (°)	Colour Temp	CD	Lumen (lm)	PF	Packing	Wattage Conversion (Halogen)	Measurement W×H(mm)
7605040410010	3	100°	White	100	250	0.42	100	25w	
7605040420010	3	100°	Coolwhite	100	250	0.42	100	25w	
7605040430010	3	100°	Warmwhite	100	250	0.42	100	25w	
7605040610010	4	100°	White	140	350	0.55	100	35w	
7605040620010	4	100°	Coolwhite	140	350	0.55	100	35w	
7605040630010	4	100°	Warmwhite	140	350	0.55	100	35w	

Value Essential Glass LED **T8**

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Measurement WxH(mm)
7641800210010	9	White	900	0.5	25	26x603
7641800220010	9	Coolwhite	900	0.5	25	
7641800230010	9	Warmwhite	900	0.5	25	
7641800410010	14	White	1400	0.5	25	26x906
7641800420010	14	Coolwhite	1400	0.5	25	
7641800430010	14	Warmwhite	1400	0.5	25	
7641800610010	18	White	1800	0.5	25	26x1212
7641800620010	18	Coolwhite	1800	0.5	25	
7641800630010	18	Warmwhite	1800	0.5	25	
7641800810010	22	White	2200	0.5	25	26x1514
7641800820010	22	Coolwhite	2200	0.5	25	
7641800830010	22	Warmwhite	2200	0.5	25	

Value Essential Nano LED T8



230V



G13



30000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Measurement WxH(mm)
7641810210010	9	White	900	0.5	25	 26x603
7641810220010	9	Coolwhite	900	0.5	25	
7641810230010	9	Warmwhite	900	0.5	25	
7641810410010	14	White	1400	0.5	25	 26x906
7641810420010	14	Coolwhite	1400	0.5	25	
7641810430010	14	Warmwhite	1400	0.5	25	
7641810610010	18	White	1800	0.5	25	 26x1212
7641810620010	18	Coolwhite	1800	0.5	25	
7641810630010	18	Warmwhite	1800	0.5	25	
7641810810010	22	White	2200	0.5	25	 26x1514
7641810820010	22	Coolwhite	2200	0.5	25	
7641810830010	22	Warmwhite	2200	0.5	25	

Value LED **Bullet**

230V

E27

15000H

Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Measurement W×H(mm)
7114112010010	20	White	1800	0.7	50	 100×183
7114112020010	20	Coolwhite	1800	0.7	50	
7114112030010	20	Warmwhite	1800	0.7	50	
7114113010010	30	White	2700	0.9	20	 118×220
7114113020010	30	Coolwhite	2700	0.9	20	
7114113030010	30	Warmwhite	2700	0.9	20	
7114114010010	40	White	3600	0.9	20	 135×255
7114114020010	40	Coolwhite	3600	0.9	20	
7114114030010	40	Warmwhite	3600	0.9	20	
7114115010010	50	White	4500	0.9	10	 140×255
7114115020010	50	Coolwhite	4500	0.9	10	
7114115030010	50	Warmwhite	4500	0.9	10	
7114117010010	70	White	6300	0.9	10	 140×235
7114117020010	70	Coolwhite	6300	0.9	10	
7114117030010	70	Warmwhite	6300	0.9	10	
7114110010010	100	White	9000	0.9	10	 140×250
7114110020010	100	Coolwhite	9000	0.9	10	
7114110030010	100	Warmwhite	9000	0.9	10	

Value LED Unilux



230V




E27



15000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Measurement W×H(mm)
7124312010010	20	White	2000	0.5	50	 4U 58×180
7124312020010	20	Coolwhite	2000	0.5	50	
7124312030010	20	Warmwhite	2000	0.5	50	
7124312510010	25	White	2500	0.9	50	 4U 58×235
7124312520010	25	Coolwhite	2500	0.9	50	
7124312530010	25	Warmwhite	2500	0.9	50	
7124313510010	35	White	3500	0.9	20	 4U 73×256
7124313520010	35	Coolwhite	3500	0.9	20	
7124313530010	35	Warmwhite	3500	0.9	20	
7124314010010	40	White	4000	0.9	20	 6U 88×280
7124314020010	40	Coolwhite	4000	0.9	20	
7124314030010	40	Warmwhite	4000	0.9	20	

Classic LED GLS



Dimmable



230V



E27



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7631111130010	2	Warmwhite	250	0.45	100	25w	
76311111230010	4	Warmwhite	400	0.45	100	35w	
76311111330010	4	Warmwhite	470	0.5	100	40w	
76311111430010	6	Warmwhite	600	0.5	100	48w	
76311111530010	8	Warmwhite	806	0.5	100	60w	
76311111730010	10	Warmwhite	1055	0.5	100	75w	
76311112330010	4	Warmwhite	470	0.9	100	40w	
76311112530010	8	Warmwhite	806	0.9	100	60w	






60×106

70×130

60×106
Dimmable

Classic LED GLS



Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7631311130010	2	Warmwhite	250	0.45	100	25w	 60×106 Frosted
7631311230010	4	Warmwhite	400	0.45	100	35w	
7631311330010	4	Warmwhite	470	0.5	100	40w	
7631311430010	6	Warmwhite	600	0.5	100	48w	
7631311530010	8	Warmwhite	806	0.5	100	60w	
7631311730010	10	Warmwhite	1055	0.5	100	75w	 70×130 Frosted
7631312330010	4	Warmwhite	470	0.9	100	40w	 60×106 Dimmable Frosted
7631312530010	8	Warmwhite	806	0.9	100	60w	
7631411530010	8	Warmwhite	720	0.5	100	55w	 60×106 Opal
7631411730010	10	Warmwhite	965	0.5	100	70w	 70×130 Opal

Classic LED Candle



Dimmable



230V





E14



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634111230010	2	Warmwhite	200	0.45	100	21w	 35×100
7634111130010	2	Warmwhite	250	0.45	100	25w	
7634111430010	4	Warmwhite	400	0.45	100	35w	
7634111330010	4	Warmwhite	470	0.45	100	40w	
7634112330010	4	Warmwhite	350	0.9	100	32w	 35×100 Dimmable

Classic LED Candle



Dimmable
 230V
 E14
 25000H
 Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634311230010	2	Warmwhite	200	0.45	100	21w	35×100 Frosted
7634311130010	2	Warmwhite	250	0.45	100	25w	
7634311430010	4	Warmwhite	400	0.45	100	35w	35×100 Dimmable Frosted
7634311330010	4	Warmwhite	470	0.45	100	40w	
7634312330010	4	Warmwhite	350	0.9	100	32w	35×100 Opal
7634411130010	2	Warmwhite	200	0.45	100	21w	
7634411330010	4	Warmwhite	400	0.45	100	35w	

Classic LED Candle Tip



Dimmable



230V



E14



2500H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634131230010	2	Warmwhite	200	0.45	100	21w	35×115 Clear
7634131130010	2	Warmwhite	250	0.45	100	25w	
7634131430010	4	Warmwhite	400	0.45	100	35w	
7634131330010	4	Warmwhite	470	0.45	100	40w	
7634132330010	4	Warmwhite	350	0.9	100	32w	35×115 Dimmable Clear
7634331430010	2	Warmwhite	200	0.45	100	21w	
7634331130010	2	Warmwhite	250	0.45	100	25w	35×115 Frosted
7634331230010	4	Warmwhite	400	0.45	100	35w	
7634331330010	4	Warmwhite	470	0.45	100	40w	35×115 Dimmable Frosted
7634332330010	4	Warmwhite	350	0.9	100	32w	

Classic LED Candle Twisted



Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634151230010	2	Warmwhite	200	0.45	100	21w	35×96 Clear
7634151130010	2	Warmwhite	250	0.45	100	25w	
7634151430010	4	Warmwhite	400	0.45	100	35w	
7634151330010	4	Warmwhite	470	0.45	100	40w	
7634152330010	4	Warmwhite	350	0.9	100	32w	35×96 Dimmable Clear
7634351230010	2	Warmwhite	200	0.45	100	21w	35×96 Frosted
7634351130010	2	Warmwhite	250	0.45	100	25w	
7634351430010	4	Warmwhite	400	0.45	100	35w	
7634351330010	4	Warmwhite	470	0.45	100	40w	
7634352330010	4	Warmwhite	350	0.9	100	32w	35×96 Dimmable Frosted

Classic LED Candle Twisted



Dimmable



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634141230010	2	Warmwhite	200	0.45	100	21w	35x96 Clear
7634141130010	2	Warmwhite	250	0.45	100	25w	
7634141430010	4	Warmwhite	400	0.45	100	35w	
7634141330010	4	Warmwhite	470	0.45	100	40w	35x96 Dimmable Clear
7634142330010	4	Warmwhite	350	0.9	100	32w	
7634341230010	2	Warmwhite	200	0.45	100	21w	
7634341130010	2	Warmwhite	250	0.45	100	25w	35x96 Frosted
7634341430010	4	Warmwhite	400	0.45	100	35w	
7634341330010	4	Warmwhite	470	0.45	100	40w	
7634342330010	4	Warmwhite	350	0.9	100	32w	35x96 Dimmable Frosted

Classic LED Ball



Dimmable



230V



E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7635121230010	2	Warmwhite	200	0.45	100	21w	 45×78
7635121130010	2	Warmwhite	250	0.45	100	25w	
7635121430010	4	Warmwhite	400	0.45	100	35w	
7635121330010	4	Warmwhite	470	0.45	100	40w	
7635122330010	4	Warmwhite	350	0.9	100	32w	 45×78 Dimmable

Classic LED Ball



Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7635321230010	2	Warmwhite	200	0.45	100	21w	45×78 Frosted
7635321130010	2	Warmwhite	250	0.45	100	25w	
7635321430010	4	Warmwhite	400	0.45	100	35w	45×78 DIMMABLE Frosted
7635321330010	4	Warmwhite	470	0.45	100	40w	
7635322330010	4	Warmwhite	350	0.9	100	32w	45×78 Opal
7635421530010	2	Warmwhite	200	0.45	100	21w	
7635421330010	4	Warmwhite	400	0.45	100	35w	

Classic LED Ball



Dimmable



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7635111230010	2	Warmwhite	200	0.45	100	21w	 45×73
7635111130010	2	Warmwhite	250	0.45	100	25w	
7635111430010	4	Warmwhite	400	0.45	100	35w	
7635111330010	4	Warmwhite	470	0.45	100	40w	
7635112330010	4	Warmwhite	350	0.9	100	32w	 45×73 Dimmable

Classic LED Ball



Dimmable



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7635311230010	2	Warmwhite	200	0.45	100	21w	
7635311130010	2	Warmwhite	250	0.45	100	25w	
7635311430010	4	Warmwhite	400	0.45	100	35w	
7635311330010	4	Warmwhite	470	0.45	100	40w	
7635312330010	4	Warmwhite	350	0.9	100	32w	
7635411130010	2	Warmwhite	200	0.45	100	21w	
7635411330010	4	Warmwhite	400	0.45	100	35w	

Classic LED Globe D80



Dimmable



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7636161230010	4	Warmwhite	470	0.5	50	40w	 80×111 Clear
7636161430010	8	Warmwhite	806	0.5	50	60w	
7636161630010	10	Warmwhite	1055	0.5	50	75w	
7636162230010	4	Warmwhite	470	0.9	50	40w	 80×111 Dimmable Clear
7636162430010	8	Warmwhite	806	0.9	50	60w	
7636361230010	4	Warmwhite	470	0.5	50	40w	 80×111 Frosted
7636361430010	8	Warmwhite	806	0.5	50	60w	
7636361630010	10	Warmwhite	1055	0.5	50	75w	 80×111 Dimmable Frosted
7636362230010	4	Warmwhite	470	0.9	50	40w	
7636362430010	8	Warmwhite	806	0.9	50	60w	

Classic LED Globe D95



Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement WxH(mm)
7637171230010	4	Warmwhite	470	0.5	50	40w	 95x130 Clear
7637171430010	8	Warmwhite	806	0.5	50	60w	
7637171630010	10	Warmwhite	1055	0.5	50	75w	
7637172230010	4	Warmwhite	470	0.9	50	40w	 95x130 Dimmable Clear
7637172430010	8	Warmwhite	806	0.9	50	60w	
7637371230010	4	Warmwhite	470	0.5	50	40w	 95x130 Frosted
7637371430010	8	Warmwhite	806	0.5	50	60w	
7637371630010	10	Warmwhite	1055	0.5	50	75w	 95x130 Dimmable Frosted
7637372230010	4	Warmwhite	470	0.9	50	40w	
7637372430010	8	Warmwhite	806	0.9	50	60w	

Classic LED Globe D125



Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement WxH(mm)
7638181230010	4	Warmwhite	470	0.5	20	40w	 125x170 Clear
7638181430010	8	Warmwhite	806	0.5	20	60w	
7638181630010	10	Warmwhite	1055	0.5	20	75w	
7638182230010	4	Warmwhite	470	0.9	20	40w	 125x170 Dimmable Clear
7638182430010	8	Warmwhite	806	0.9	20	60w	
7638381230010	4	Warmwhite	470	0.5	20	40w	 125x170 Frosted
7638381430010	8	Warmwhite	806	0.5	20	60w	
7638381630010	10	Warmwhite	1055	0.5	20	75w	 125x170 Dimmable Frosted
7638382230010	4	Warmwhite	470	0.9	20	40w	
7638382430010	8	Warmwhite	806	0.9	20	60w	

Classic LED R39



230V



E14



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7633390230010	0.9	Warmwhite	100	0.4	100	10w	 39×67

Classic LED R50



230V



E14



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7633500230010	2	Warmwhite	180	0.4	100	19w	
7633500430010	4	Warmwhite	330	0.4	100	30w	

Classic LED R63



230V




E27



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7633630430010	4	Warmwhite	400	0.4	100	35w	 63×105
7633630630010	6	Warmwhite	600	0.5	100	48w	

Classic LED R80



230V



E27



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7633800430010	4	Warmwhite	400	0.4	50	35w	 80×112
7633800630010	6	Warmwhite	600	0.5	50	48w	
7633800830010	6.7	Warmwhite	720	0.5	50	55w	

Classic LED G4




Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7780081510010	0.9	White	70	0.7	200	10w	
7780081520010	0.9	Coolwhite	70	0.7	200	10w	
7780081530010	0.9	Warmwhite	70	0.7	200	10w	

Classic LED G9



 230V
  G9
  15000H
  Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement (W×H(mm))
7780062510010	2.5	White	270	0.9	200	26w	 16×60
7780062520010	2.5	Coolwhite	270	0.9	200	26w	
7780062530010	2.5	Warmwhite	270	0.9	200	26w	

Classic Vintage

Outstanding decorative LED bulbs achieve the same vintage style look and create an antique atmosphere with energy saving.

Classic Vintage LED GLS



Dimmable



230V








E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7631211330010	4	2200	330	0.5	100	30 _w	 60×106
7631211530010	8	2200	630	0.5	100	50 _w	 70×130
7631211730010	10	2200	806	0.5	100	60 _w	 60×106
7631212330010	4	2200	330	0.9	100	30 _w	 60×106
7631212530010	8	2200	630	0.9	100	50 _w	 Dimmable

Classic Vintage LED Candle



Dimmable



230V






E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634211130010	2	2200	170	0.45	100	18w	 35×100
7634211330010	4	2200	330	0.45	100	30w	 35×100
7634212330010	4	2200	250	0.9	100	25w	 35×100 Dimmable

Classic Vintage LED Candle Tip



Dimmable



230V





E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634231130010	2	2200	170	0.45	100	18w	 35×115
7634231330010	4	2200	330	0.45	100	30w	
7634232330010	4	2200	250	0.9	100	25w	 35×115 Dimmable

Classic Vintage LED Candle Twisted



Dimmable



230V






E14



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7634251130010	2	2200	170	0.45	100	18w	 35×96
7634251330010	4	2200	330	0.45	100	30w	 35×96
7634252330010	4	2200	250	0.9	100	25w	 35×96 Dimmable

Classic Vintage LED Ball



Dimmable



230V






E14



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7635221130010	2	2200	170	0.45	100	18w	 45×78
7635221330010	4	2200	330	0.45	100	30w	 45×78
7635222330010	4	2200	250	0.9	100	25w	 45×78 Dimmable

Classic Vintage LED Ball



Dimmable



230V



E27



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7635211130010	2	2200	170	0.45	100	18w	45×73
7635211330010	4	2200	330	0.45	100	30w	45×73
7635212330010	4	2200	250	0.9	100	25w	45×73 Dimmable

Classic Vintage LED Globe D80



Dimmable



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7636261230010	4	2200	330	0.5	50	30w	 80×111
7636261430010	8	2200	630	0.5	50	50w	
7636261630010	10	2200	806	0.5	50	60w	
7636262230010	4	2200	330	0.9	50	30w	 80×111 Dimmable
7636262430010	8	2200	630	0.9	50	50w	

Classic Vintage LED Globe D95



Dimmable



230V



E27



25000H





Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7637271230010	4	2200	330	0.5	50	30w	 95×130
7637271430010	8	2200	630	0.5	50	50w	
7637271630010	10	2200	806	0.5	50	60w	
7637272230010	4	2200	330	0.9	50	30w	 95×130 Dimmable
7637272430010	8	2200	630	0.9	50	50w	

Classic Vintage LED Globe D125



 Dimmable
  230V
  E27
  25000H
  Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7638281230010	4	2200	330	0.5	20	30w	 125×170
7638281430010	8	2200	630	0.5	20	50w	
7638281630010	10	2200	806	0.5	20	60w	
7638282230010	4	2200	330	0.9	20	30w	 125×170 Dimmable
7638282430010	8	2200	630	0.9	20	50w	

Classic Vintage LED Rustica Tradition Tip



Dimmable



230V



E27



25000H



Ra ≥ 80

Art. No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement WxH(mm)
7637211130010	2	2200	170	0.45	100	18w	 64x143
76372111330010	4	2200	330	0.5	100	30w	
76372111530010	8	2200	630	0.5	100	50w	
76372111730010	10	2200	806	0.5	100	60w	
7637212330010	4	2200	330	0.9	100	30w	 64x143 Dimmable
7637212530010	8	2200	630	0.9	100	50w	

Classic Deco

As LUXRAM's patented products, Deco's modern aesthetic appearance design and excellent photometric property decorate every space and every moment in everyone's life.

Classic Deco LED T25



230V



E14



2500H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7632110230010	2	Warmwhite	200	0.4	100	21w	 25×80

Classic Silver Top LED **Globe D95**



Dimmable



230V



E27



25000H





Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7637471230010	4	Warmwhite	400	0.5	50	35w	 95×130
7637471430010	8	Warmwhite	700	0.5	50	54w	
7637471630010	10	Warmwhite	900	0.5	50	66w	
7637472230010	4	Warmwhite	400	0.9	50	35w	 95×130 Dimmable
7637472430010	8	Warmwhite	700	0.9	50	54w	

Classic Gold Top LED Globe D95



 Dimmable
  230V
  E27
  25000H
  Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7637571230010	4	Warmwhite	400	0.5	50	35w	 95×130
7637571430010	8	Warmwhite	700	0.5	50	54w	
7637571630010	10	Warmwhite	900	0.5	50	66w	
7637572230010	4	Warmwhite	400	0.9	50	35w	 95×130 Dimmable
7637572430010	8	Warmwhite	700	0.9	50	54w	

Classic Rose Gold Top LED Globe D95



Dimmable



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7637671230010	4	Warmwhite	400	0.5	50	35w	 95×130
7637671430010	8	Warmwhite	700	0.5	50	54w	
7637671630010	10	Warmwhite	900	0.5	50	66w	
7637672230010	4	Warmwhite	400	0.9	50	35w	 95×130 Dimmable
7637672430010	8	Warmwhite	700	0.9	50	54w	

Classic Silver Top LED Globe D125



Dimmable



230V



E27



25000H



Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7637481230010	4	Warmwhite	400	0.5	20	35w	 125×170
7637481430010	8	Warmwhite	700	0.5	20	54w	
7637481630010	10	Warmwhite	900	0.5	20	66w	
7637482230010	4	Warmwhite	400	0.9	20	35w	 125×170 Dimmable
7637482430010	8	Warmwhite	700	0.9	20	54w	

Classic Gold Top LED Globe D125



Dimmable



230V



E27



25000H





Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7637581230010	4	Warmwhite	400	0.5	20	35w	 125×170
7637581430010	8	Warmwhite	700	0.5	20	54w	
7637581630010	10	Warmwhite	900	0.5	20	66w	
7637582230010	4	Warmwhite	400	0.9	20	35w	 125×170 Dimmable
7637582430010	8	Warmwhite	700	0.9	20	54w	

Classic Rose Gold Top LED Globe D125



 Dimmable
  230V
  E27
  25000H
  Ra ≥ 80

Art . No	Watt (W)	Colour Temp	Lumen (lm)	PF	Packing	Wattage Conversion (Standard)	Measurement W×H(mm)
7637681230010	4	Warmwhite	400	0.5	20	35w	 125×170
7637681430010	8	Warmwhite	700	0.5	20	54w	
7637681630010	10	Warmwhite	900	0.5	20	66w	
7637682230010	4	Warmwhite	400	0.9	20	35w	 125×170 Dimmable
7637682430010	8	Warmwhite	700	0.9	20	54w	