

# *Professional*

*Staying with its distinctive identity, it sets the true value by the combination of outstanding performance, reliable quality, innovative design and functionality.*

## Hivision LED GLS

**5**  
YEARS  
WARRANTY

**150**  
LM/W



**185~264V**  
VOLTAGE

**E27**  
CAP

**≥80**  
RA

**230°A**  
BEAM

**25000H**  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1020002	7	1050	0.5	3000	100	
1020003	7	1050	0.5	4000	100	
1020004	7	1050	0.5	6400	100	
1020012	9	1350	0.5	3000	100	60x110
1020013	9	1350	0.5	4000	100	
1020014	9	1350	0.5	6400	100	
1020022	12	1800	0.5	3000	100	60x118
1020023	12	1800	0.5	4000	100	
1020024	12	1800	0.5	6400	100	
1020032	15	2250	0.5	3000	100	65x134
1020033	15	2250	0.5	4000	100	
1020034	15	2250	0.5	6400	100	

## Hivision LED Candle

**5**  
YEARS  
WARRANTY

**125**  
LM/W

**FLICKERING  
FREE**

**CE**

**IC**  
DRIVER




**185~264V**  
VOLTAGE

**E14**  
CAP

**≥80**  
RA

**230°A**  
BEAM

**25000H**  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1020042	6.5	806	0.5	3000	100	 37×108
1020043	6.5	806	0.5	4000	100	
1020044	6.5	806	0.5	6400	100	

# Hivision LED Candle Tip

**5**  
YEARS  
WARRANTY

**125**  
LM/W

**FLICKERING  
FREE**

**CE**

**IC**  
DRIVER




**185~264V**  
VOLTAGE

**E14**  
CAP

**≥80**  
RA

**230°**  
BEAM

**25000H**  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1020052	6.5	806	0.5	3000	100	
1020053	6.5	806	0.5	4000	100	
1020054	6.5	806	0.5	6400	100	 37×129

## Hivision LED Ball

**5**  
YEARS  
WARRANTY

**125**  
LM/W



FLICKERING  
FREE



IC  
DRIVER




185~264V~  
VOLTAGE

E14  
CAP

≥80  
RA

230°A  
BEAM

25000H  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1020062	6.5	806	0.5	3000	100	 45x81
1020063	6.5	806	0.5	4000	100	
1020064	6.5	806	0.5	6400	100	

## Hivision LED Ball

**5**  
YEARS  
WARRANTY

**125**  
LM/W




**185~264V**  
VOLTAGE

**E27**  
CAP

**≥80**  
RA

**230°A**  
BEAM

**25000H**  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1020072	6.5	806	0.5	3000	100	 45x79
1020073	6.5	806	0.5	4000	100	
1020074	6.5	806	0.5	6400	100	

# Hivision LED AR111 Driver included

**5**  
YEARS  
WARRANTY



IC  
DRIVER




185~264V  $\frac{1}{4}$   
VOLTAGE

G13  
CAP

$\geq 80$   
RA

36°  $\Delta$   
BEAM

25000H  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1020082	11	810	0.5	3000	50	
1020083	11	810	0.5	4000	50	
1020084	11	810	0.5	6400	50	 111x62

## Truevision LED GLS

**5**  
YEARS  
WARRANTY

**Ra**   
≥90

  
FLICKERING  
FREE

**CE**

**IC**  
DRIVER






**185~264V**   
VOLTAGE

**E27**  
CAP

**≥90**  
RA

**230°A**  
BEAM

**25000H**  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1030002	7	600	0.5	3000	100	
1030003	7	600	0.5	4000	100	
1030004	7	600	0.5	6400	100	
1030012	9	806	0.5	3000	100	60×110
1030013	9	806	0.5	4000	100	
1030014	9	806	0.5	6400	100	
1030022	12	1055	0.5	3000	100	
1030023	12	1055	0.5	4000	100	
1030024	12	1055	0.5	6400	100	60×118
1030032	15	1521	0.5	3000	100	
1030033	15	1521	0.5	4000	100	
1030034	15	1521	0.5	6400	100	65×134

# Truevision LED Candle

**5** YEARS  
WARRANTY

**Ra** ☀️  
≥ 90

FLICKERING  
FREE

CE

IC  
DRIVER





185~264V ⚡  
VOLTAGE

E14  
CAP

≥90  
RA

230°A  
BEAM

25000H  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1030052	5	400	0.5	3000	100	 37×100
1030053	5	400	0.5	4000	100	
1030054	5	400	0.5	6400	100	
1030072	7	560	0.5	3000	100	
1030073	7	560	0.5	4000	100	 37×108
1030074	7	560	0.5	6400	100	

## Truevision LED Candle Tip

**5**  
YEARS  
WARRANTY

**Ra**  
≥90

**FLICKER-FREE**

**CE**

**IC**  
DRIVER





**185-264V**  
VOLTAGE

**E14**  
CAP

**≥90**  
RA

**230°**  
BEAM

**25000H**  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing	
1030092	5	400	0.5	3000	100	 37x129
1030093	5	400	0.5	4000	100	
1030094	5	400	0.5	6400	100	
1030112	7	560	0.5	3000	100	 37x137
1030113	7	560	0.5	4000	100	
1030114	7	560	0.5	6400	100	

## Truevision LED Ball

**5**  
YEARS  
WARRANTY

**Ra**  
≥90

**FLICKERING  
FREE**

**CE**

**IC  
DRIVER**



**185-264V**  
VOLTAGE

**E14**  
CAP

**≥90**  
RA

**230°A**  
BEAM

**25000H**  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing
1030132	5	400	0.5	3000	100
1030133	5	400	0.5	4000	100
1030134	5	400	0.5	6400	100
1030152	7	560	0.5	3000	100
1030153	7	560	0.5	4000	100
1030154	7	560	0.5	6400	100



45x81

## Truevision LED Ball

**5**  
YEARS  
WARRANTY

**Ra** ☀️  
≥90

FLICKERING  
FREE

CE

IC  
DRIVER



185~264V ⚡  
VOLTAGE

E27  
CAP

≥90  
RA

230°A  
BEAM

25000H  
LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Packing
1030172	5	400	0.5	3000	100
1030173	5	400	0.5	4000	100
1030174	5	400	0.5	6400	100
1030192	7	560	0.5	3000	100
1030193	7	560	0.5	4000	100
1030194	7	560	0.5	6400	100



45x79

## Truevision LED GU10

**5**  
YEARS  
WARRANTY

**Ra**  
≥90

FLICKERING  
FREE

CE

IC  
DRIVER



100°

36°

**185~264V** **GU10** **≥90** **25000H**  
VOLTAGE CAP RA LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Beam [°]	Packing
1030222	5	400	0.5	3000	36°	100
1030223	5	400	0.5	4000	36°	100
1030224	5	400	0.5	6400	36°	100
1030242	7	550	0.5	3000	36°	100
1030243	7	550	0.5	4000	36°	100
1030244	7	550	0.5	6400	36°	100
1030272	5	400	0.5	3000	100°	100
1030273	5	400	0.5	4000	100°	100
1030274	5	400	0.5	6400	100°	100
1030292	7	550	0.5	3000	100°	100
1030293	7	550	0.5	4000	100°	100
1030294	7	550	0.5	6400	100°	100



## Truevision LED MR16

**5**  
YEARS  
WARRANTY

**Ra**  
≥90

FLICKERING  
FREE

CE

IC  
DRIVER




12V ⚡ GU5.3 ≥90 25000H  
VOLTAGE CAP RA LIFE TIME

Art.No	Watt [W]	Lumen [lm]	PF	Colour Temp [K]	Beam [°]	Packing
1030322	5	400	0.7	3000	36°	100
1030323	5	400	0.7	4000	36°	100
1030324	5	400	0.7	6400	36°	100
1030342	7	550	0.7	3000	36°	100
1030343	7	550	0.7	4000	36°	100
1030344	7	550	0.7	6400	36°	100
1030372	5	400	0.7	3000	100°	100
1030373	5	400	0.7	4000	100°	100
1030374	5	400	0.7	6400	100°	100
1030392	7	550	0.7	3000	100°	100
1030393	7	550	0.7	4000	100°	100
1030394	7	550	0.7	6400	100°	100




## Luminous Intensity Distribution

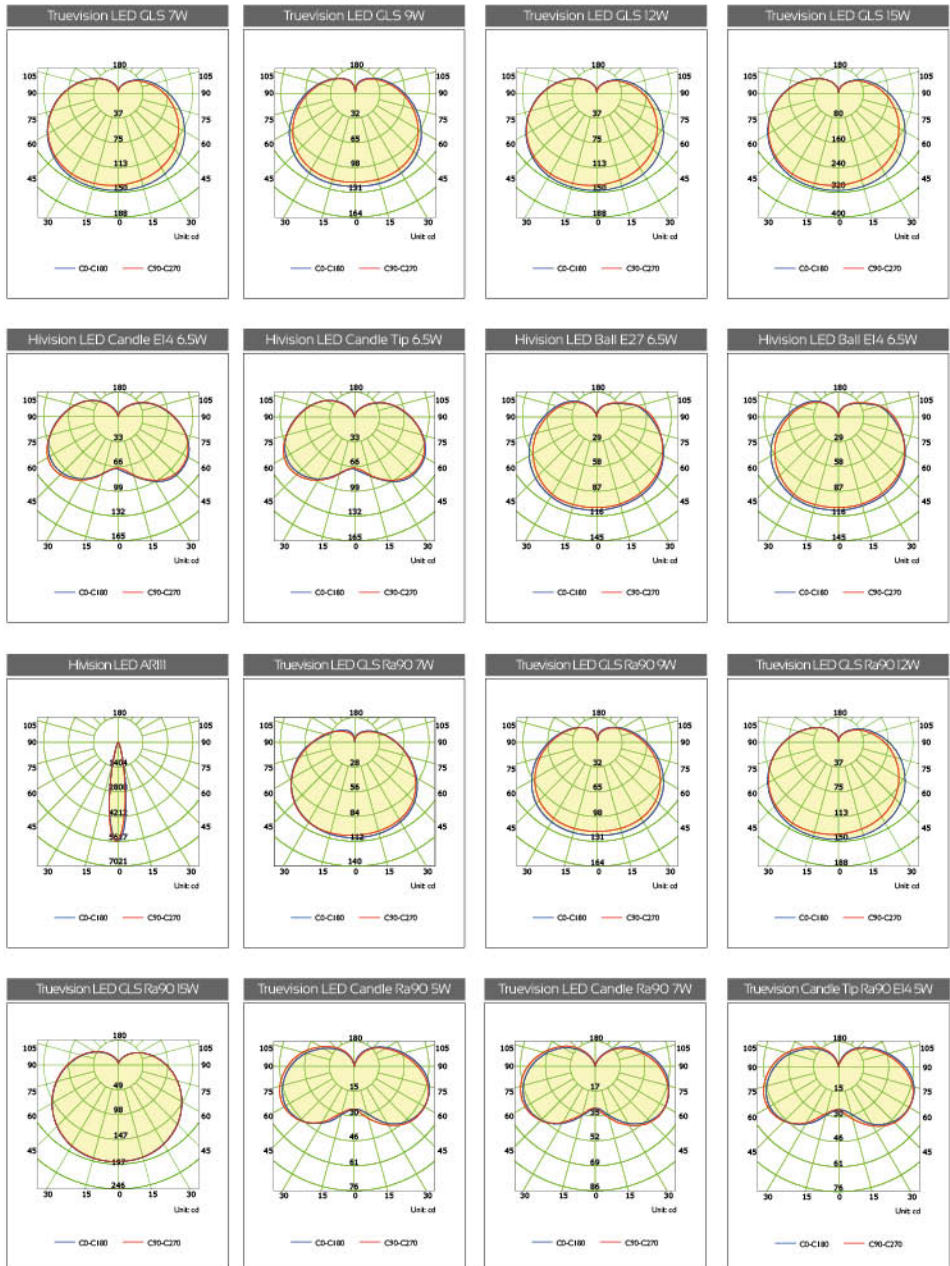


## Luminous Intensity Distribution


Truevision Candle Tip Ra90 E14 6W

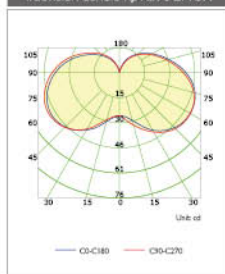


Truevision Candle Tip Ra90 E14 7W

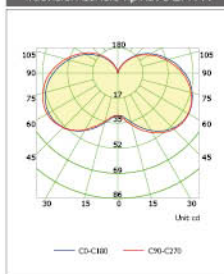


Truevision Candle Ra90 E27 4W

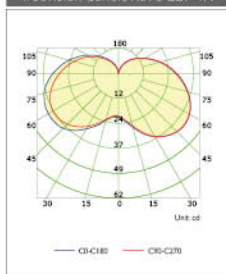


Truevision Candle Ra90 E27 5W

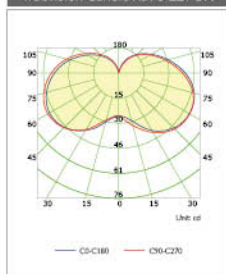


Truevision Candle Ra90 E27 6W

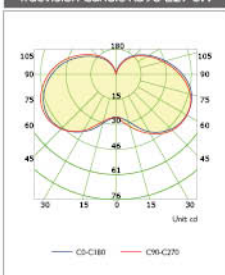


Truevision Candle Ra90 E27 7W

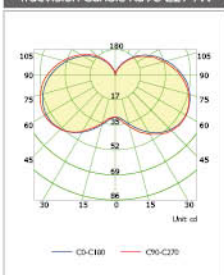


Truevision LED Ball Ra90 E14 4W

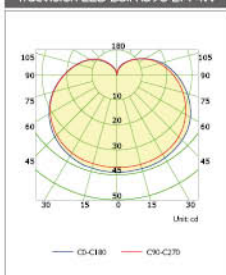


Truevision Candle Tip Ra90 E14 4W

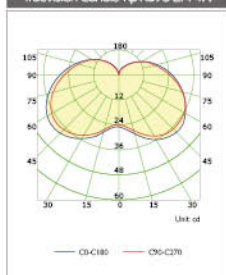


Truevision Candle Tip Ra90 E14 5W

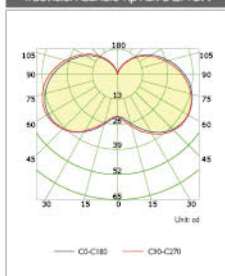


Truevision Candle Tip Ra90 E14 6W

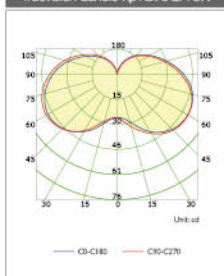


Truevision Candle Tip Ra90 E14 7W

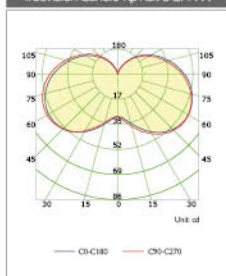


Truevision Ball Ra90 E27 4W

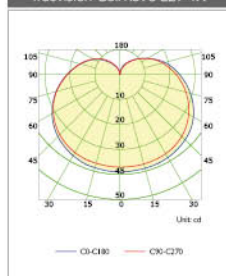


Truevision Ball Ra90 E27 5W

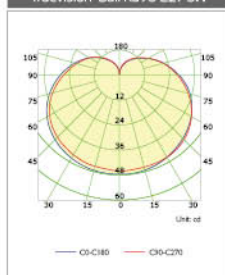


Truevision Ball Ra90 E27 6W

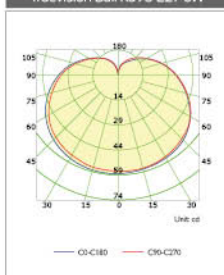


Truevision Ball Ra90 E27 7W

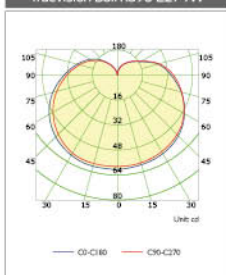

Truevision Ball Ra90 E14 4W

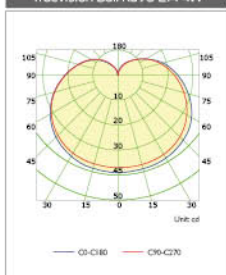


## Luminous Intensity Distribution

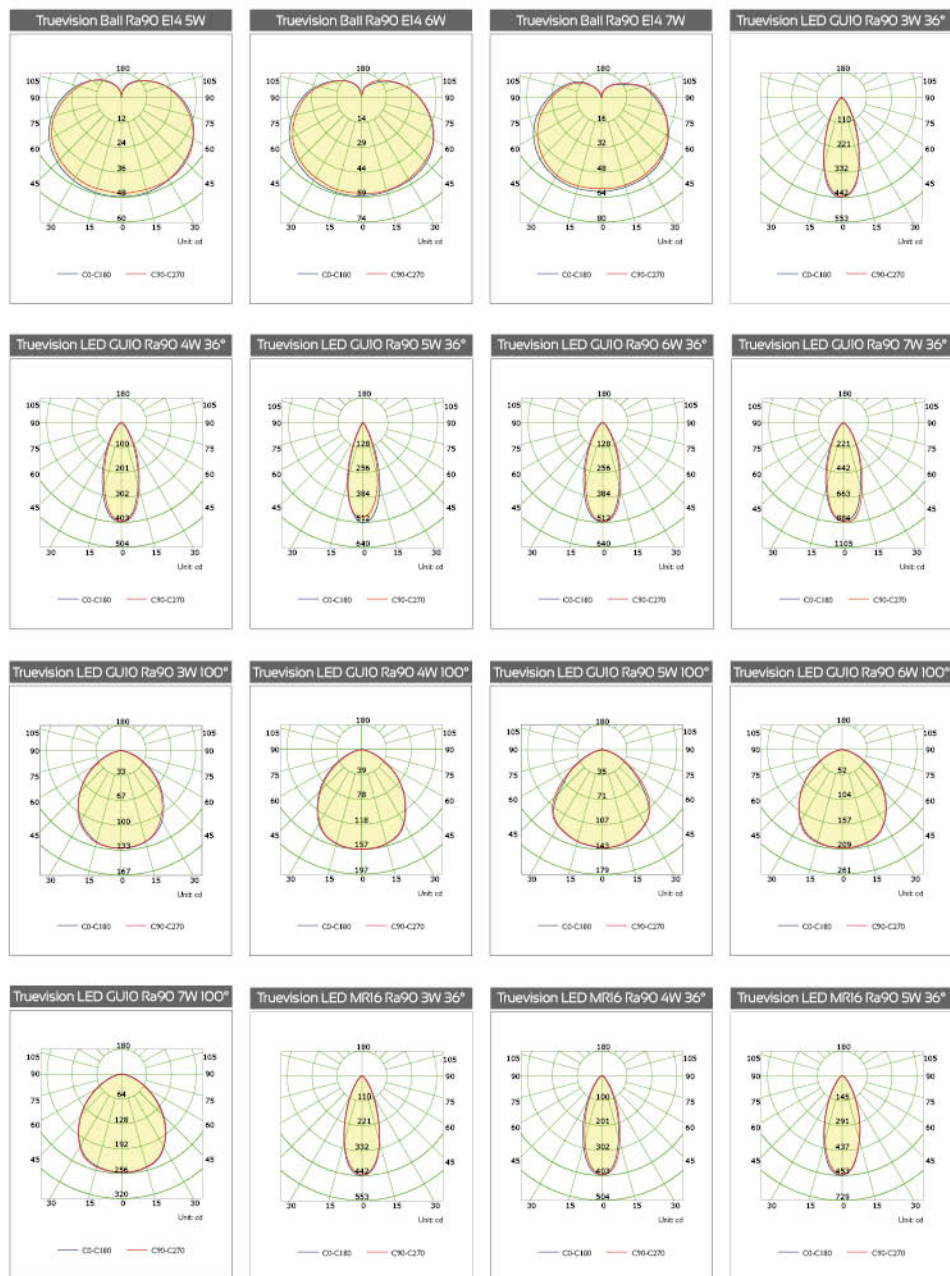


## Luminous Intensity Distribution


Truevision LED MR16 Ra90 6W 36°




Truevision LED MR16 Ra90 7W 36°

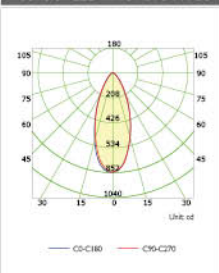


Truevision LED MR16 Ra90 3W 100°

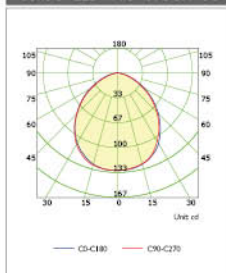


Truevision LED MR16 Ra90 4W 100°

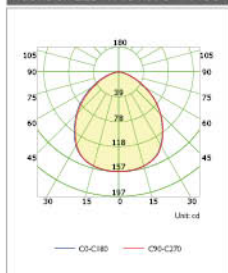

Truevision LED MR16 Ra90 5W 100°

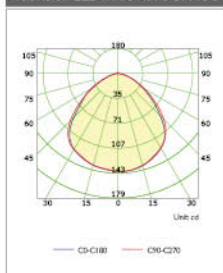

Truevision LED MR16 Ra90 6W 100°

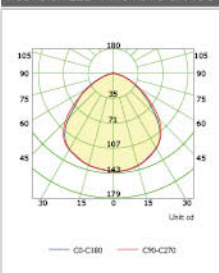

Truevision LED MR16 Ra90 7W 100°

