

Catalogue

LED Luminaires

TECHTOUCH

TECHTOUCH

Auramag Linear



Contents

Aluminium Recessed Magnetic Series

Auramag Linear

Aluminum/plastic



Aluminum Profile

(Recessed Magnetic Track Series/surface Mounted Magnetic Track Series/general Accessories)



Auramag Linear Thin

Aluminum Surface Mounting



Aluminum Profile -ultra-thin





Flood Light X²

Auramag Linear Aluminum Series



Flood Light X²

Auramag Linear Aluminum Series



Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6001011	14W	1260lm	300×23×25mm	120°	3000K/4000K/6500K	Aluminum+PC
6001021	24w	2160lm	600×23×25mm			
6001031	45w	4050lm	1200×23×25mm			

300mm

600mm

1200mm



90° Flood Light X²

Auramag Linear Aluminum Series



Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6001111	24W	2160lm	L300×300×W23×H25mm	120°	3000K/4000K/6500K	Aluminum+PC

300mm



90° Flood Light X²

Auramag Linear Aluminum Series



Grille Light X²

Auramag Linear Aluminum Series



Grille Light X²

Auramag Linear Aluminum Series

Aluminum
+
Plastic

90
RA>

48V
SAFETY
VOLTAGE

U
MAGNETIC
INSTALLATION

↔
TWO-WAYS

24°

3000K

4000K

6500K

Technical Data


Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6001211	18W	1620lm	300×23×25mm	24°	3000K/4000K/6500K	Aluminum+PC
6001221	24w	2160lm	600×23×25mm			
6001231	45w	4050lm	1200×23×25mm			





Adjustabe Grille Light X²

Auramag Linear Aluminum Series




Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6001311	12W	1080lm	160×23×137mm	24°	3000K/4000K/6500K	Aluminum+PC
6001321	24w	2160lm	300×23×137mm			

160mm



300mm



Adjustabe Grille Light

Auramag Linear Aluminum Series



Spot Light X²

Auramag Linear Aluminum Series




Spot Light X²

Auramag Linear Aluminum Series



Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6001411	8W	720lm	Φ40×100mm			
6001421	10W	900lm	Φ50×120mm			
6001431	14W	1260lm	Φ56×135mm	24°	3000K/4000K/6500K	Aluminum+PC
6001441	18W	1620lm	Φ66×154mm			
6001451	24W	2160lm	Φ75×165mm			

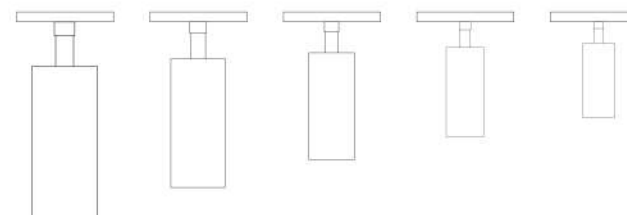




Pendant Spot Light X²

Auramag Linear Aluminum Series



Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6001511	6W	540lm	Φ35×260mm	24°	3000K/4000K/6500K	Aluminum+PC
6001521	8w	720lm	Φ40×300mm			
6001531	10w	900lm	Φ50×300mm			



Pendant Spot Light X²

Auramag Linear Aluminum Series



Flood Light Y²

Auramag Linear Plastic Series



Flood Light Y²

Auramag Linear Plastic Series

Plastic

90
RA>

48V
SAFETY
VOLTAGE

U
MAGNETIC
INSTALLATION

↔
TWO-WAYS

120°

3000K

4000K

6500K

Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6011011	12W	1080lm	296×22×25mm	120°	3000K/4000K/6500K	Plastic
6011021	24W	2160lm	596×22×25mm			
6011031	36W	3240lm	896×22×25mm			





Grille Light Y²

Auramag Linear Plastic Series

Plastic

90
RA>

48V
SAFETY
VOLTAGE

U
MAGNETIC
INSTALLATION

↔
TWO-WAYS

24°

3000K

4000K

6500K

Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6011111	6W	540lm	108×22×25mm	24°	3000K/4000K/6500K	Plastic
6011121	12W	1080lm	216×22×25mm			
6011131	18W	1620lm	324×22×25mm			
6011141	24W	2160lm	432×22×25mm			



Grille Light Y²

Auramag Linear Plastic Series



Adjustabe Grille Light Y²


Auramag Linear Plastic Series




Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6011211	6W	540lm	108.3×22×35mm T2.0mm	24°	3000K/4000K/6500K	Plastic
6011221	12W	1080lm	216.3×22×35mm T2.0mm			
6011231	18W	1620lm	324.3×22×36mm T2.0mm			


108.3mm



216.3mm



324.3mm



Adjustabe Grille Light Y²

Auramag Linear Plastic Series




Spot Light Y²

Auramag Linear Plastic Series



Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6011311	6W	540lm	50×H118mm	24°	3000K/4000K/6500K	Plastic
6011321	12W	1080lm	65×H138mm			



Spot Light Y²

Auramag Linear Plastic Series

Pendant Spot Light Y²

Auramag Linear Plastic Series

Plastic

90
RA>

48V
SAFETY
VOLTAGE

U
MAGNETIC
INSTALLATION

↔
TWO-WAYS

24°

36°

60°

3000K

4000K

6500K

Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6011411	6W	540lm	Φ30×H300mm	24°/36°/60°	3000K/4000K/6500K	Plastic




Pendant Spot Light Y²

Auramag Linear Plastic Series

Recessed Magnetic Track Series

Aluminum



6031019



L-joint 90°
6031029



In Corner
6031039



Out Corner
6031049



Tee Angle
6031059




Cross Corner
6031069



End Cap
6031079



L-connect Plate
6031089



6031119



L-joint 90°
6031129



In Corner
6031139



Out Corner
6031149



Tee Angle
6031159




Cross Corner
6031169



End Cap
6031179



L-connect Plate
6031189



6031219



L-joint 90°
6031229



In Corner
6031239



Out Corner
6031249



Tee Angle
6031259




Cross Corner
6031269



End Cap
6031279



L-connect Plate
6031289



6031319



L-joint 90°
6031329



In Corner
6031339



Out Corner
6031349



Tee Angle
6031359




Cross Corner
6031369



End Cap
6031379



L-connect Plate
6031389



6031419



L-joint 90°
6031429



In Corner
6031439



Out Corner
6031449



Tee Angle
6031459



Cross Corner
6031469



End Cap
6031479




L-connect Plate
6031489

Magnetic Track Series

Recessed/surface Mounted

Recessed Magnetic Track Series

Aluminum



6031519



L-joint 90°
6031529



In Corner
6031539



Out Corner
6031549



Tee Angle
6031559




Cross Corner
6031569



End Cap
6031579



L-connect Plate
6031589



6031619



L-joint 90°
6031629



In Corner
6031639



Out Corner
6031649



Tee Angle
6031659



Cross Corner
6031669



End Cap
6031679



L-connect Plate
6031689

Surface Mounted Magnetic Track Series

Aluminum



6031719



L-joint 90°
6031729



In Corner
6031739



Out Corner
6031749



Tee Angle
6031759




Cross Corner
6031769



Suspension Bucket
6031779



L-connect Plate
6031789



6031819



L-joint 90°
6031829



In Corner
6031839



Out Corner
6031849



Tee Angle
6031859



Cross Corner
6031869



Suspension Bucket
6031879



L-connect Plate
6031889

Magnetic Track Series

Recessed/surface Mounted

Auramag Linear

General Accessories



Art.no.6032018
Name: 100w Driver Module
Size: 200×22×25mm



Art.no.6032118
Name: 200w Driver Module
Size: 260×22×25mm



Art.no.6032218
Name: Input Module



Art.no.6032318
Name: Pass-through Module



Art.no.6032418
Name: Corner Module

General Accessories

Auramag Linear



Flood Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series

Aluminum
+
Plastic

90
RA>

48V
SAFETY
VOLTAGE

U
MAGNETIC
INSTALLATION

←→
TWO-WAYS

120°

3000K

4000K

6500K

Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6021011	14W	1260lm	294×24×29.5mm	120°	3000K/4000K/6500K	Aluminum+PC
6021021	24w	2160lm	582×24×29.5mm			




Flood Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series



Grille Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series

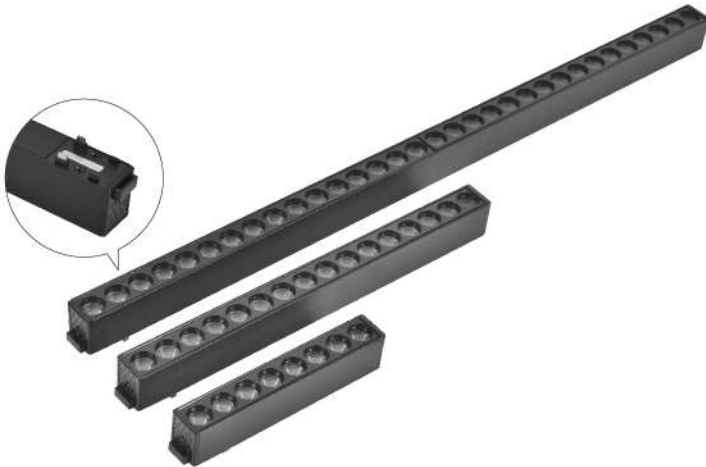

Grille Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series

Aluminum
+
Plastic

90
RA>

48V
SAFETY
VOLTAGE

U
MAGNETIC
INSTALLATION

↔
TWO-WAYS

24°

3000K

4000K

6500K

Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6021111	10W	900lm	150×24×29.5mm	24°	3000K/4000K/6500K	Aluminum+PC
6021121	18W	1620lm	294×24×29.5mm			
6021131	24W	2160lm	582×24×29.5mm			






Adjustable Grille Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series



Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6021211	10W	900lm	158×30×45.5mm	24°	3000K/4000K/6500K	Aluminum+PC
6021221	24W	2160lm	301.5×30×45.5mm			



Adjustable Grille Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series



Pendant Spot Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series




Pendant Spot Light Z²

Auramag Linear Thin -Aluminum Surface Mounting Series



Technical Data

Art.NO.	Watt[W]	Lumen[lm]	Dimension L×W×H[mm]	Beam angle	Color Temperature	Material
6021311	8W	720lm	Φ41×267mm	24°	3000K/4000K/6500K	Aluminum+PC



Ultra-thin

Aluminum Profile/General Accessories



Aluminum Profile - Ultra-thin



Art.NO.6021511 / 1000×24×7mm Aluminium
Art.NO.6021521 / 2000×24×7mm Aluminium
Art.NO.6021531 / 3000×24×7mm Aluminium

Power Accessories



Art.no.6021711
Name: 200w Driver Module
Size: 305×24×24mm



Art.no.6021721
Name: Input Module



Art.no.6021731
Name: Corner Module

Accessories



Art.no.6021611
I-connector



Art.no.6021621
L-connector



Art.no.6021631
T-connector



Art.no.6021641
X-connector



Art.no.6021651
Right Angle-connector